



PFMF370-32-1
1-LINE + GND SCIF/FACILITY FILTER

SPECIFICATIONS


- MAX VOLTAGE: 0-277VAC
- MAX CURRENT: 32A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC (PRIOR TO INSTALLING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V in 30S
- VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD
- OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
- PERFORMANCE: 100dB (14KHZ TO 40GHZ)
- MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

- MIL-STD-220
- MIL-F-15733
- MIL-STD-810
- LV DIRECTIVE



CONFORMS TO
 UL STD 1283

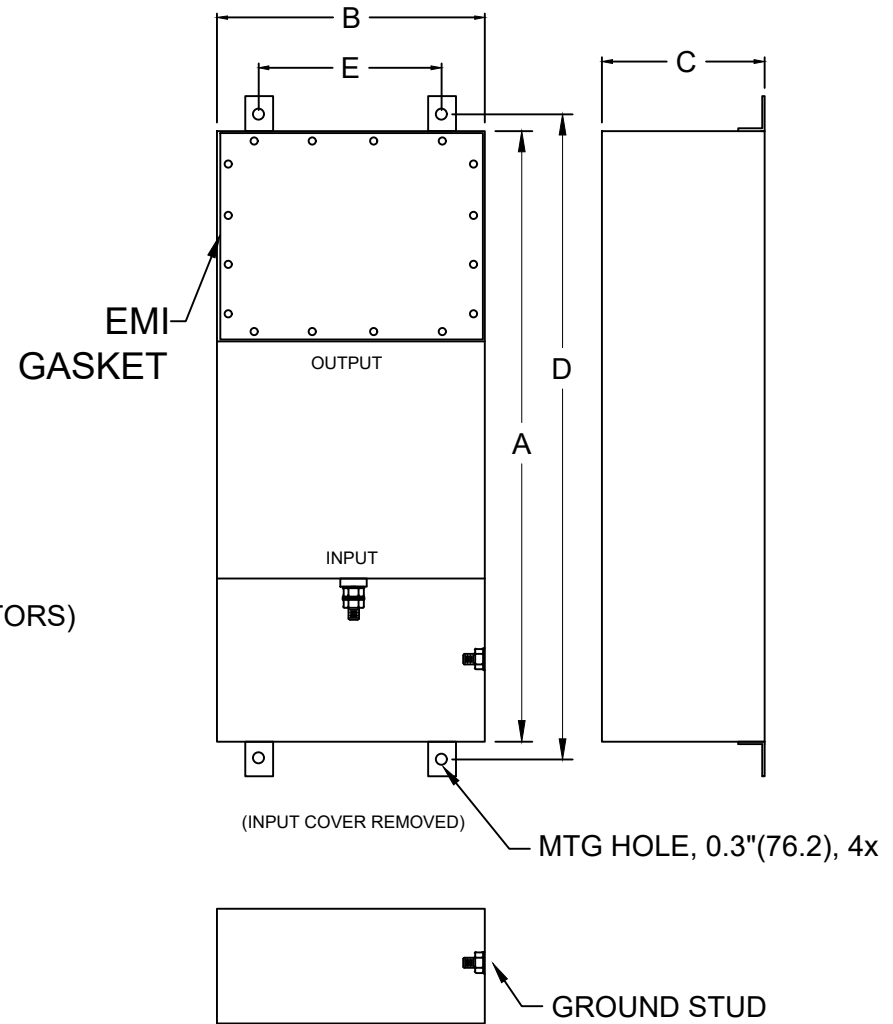

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.

| MODEL | AMPS | TERMINAL | DIMENSIONS - MM (IN) | | | | | WEIGHT LBS(KG) |
|--------------|------|----------|----------------------|-----|-------|--------|-----|----------------|
| | | | A | B | C | D | E | |
| PFMF370-32-1 | 32 | M6 | 813 | 152 | 132 | 851 | 102 | 30(13.6) |
| | | | (32) | (6) | (5.2) | (33.5) | (4) | |