

**PFMF370-800-1**

**1-LINE + GND SCIF/FACILITY FILTER**

**SPECIFICATIONS**

MAX VOLTAGE: 0-277VAC

MAX CURRENT: 800A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC (PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

MIL-STD-220



MIL-F-15733

MIL-STD-810

LV DIRECTIVE



CONFORMS TO  
UL STD 1283

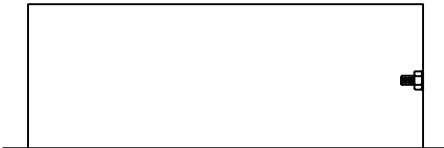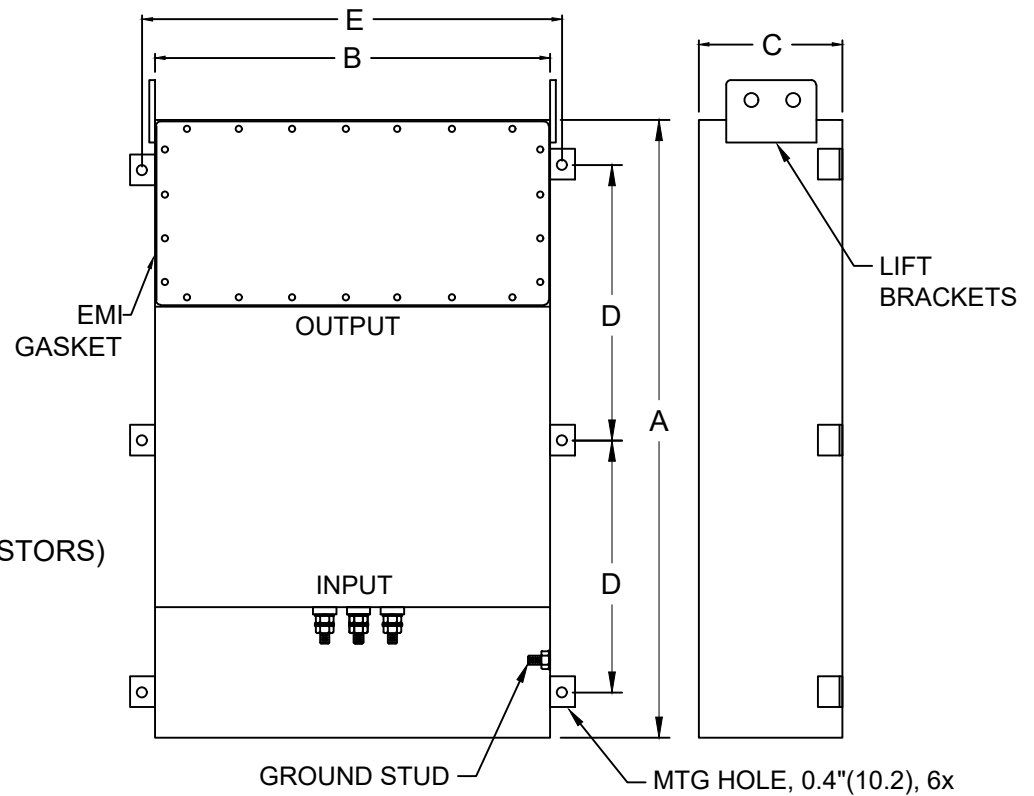

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.  
PREMIER CAN ADD CUTOUTS SPECIFIED AT TIME OF ORDERING.

MODEL	AMPS	TERMINAL	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMF370-800-1	800	3xM16	2032 (80)	355 (14)	380 (15)	965 (38)	406 (16)	335 (152.3)