



**PFMF370-800-3**  
**3-LINE + GND SCIF/FACILITY FILTER**


**SPECIFICATIONS**

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 800A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC  
 (PRIOR TO INSTALLING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD
- OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
- PERFORMANCE: 100dB (14KHZ TO 40GHZ)
- MANUFACTURED IN ACCORDANCE WITH  
 THE FOLLOWING STANDARDS:

- MIL-STD-220
- MIL-F-15733
- MIL-STD-810
- LV DIRECTIVE



CONFORMS TO  
 UL STD 1283

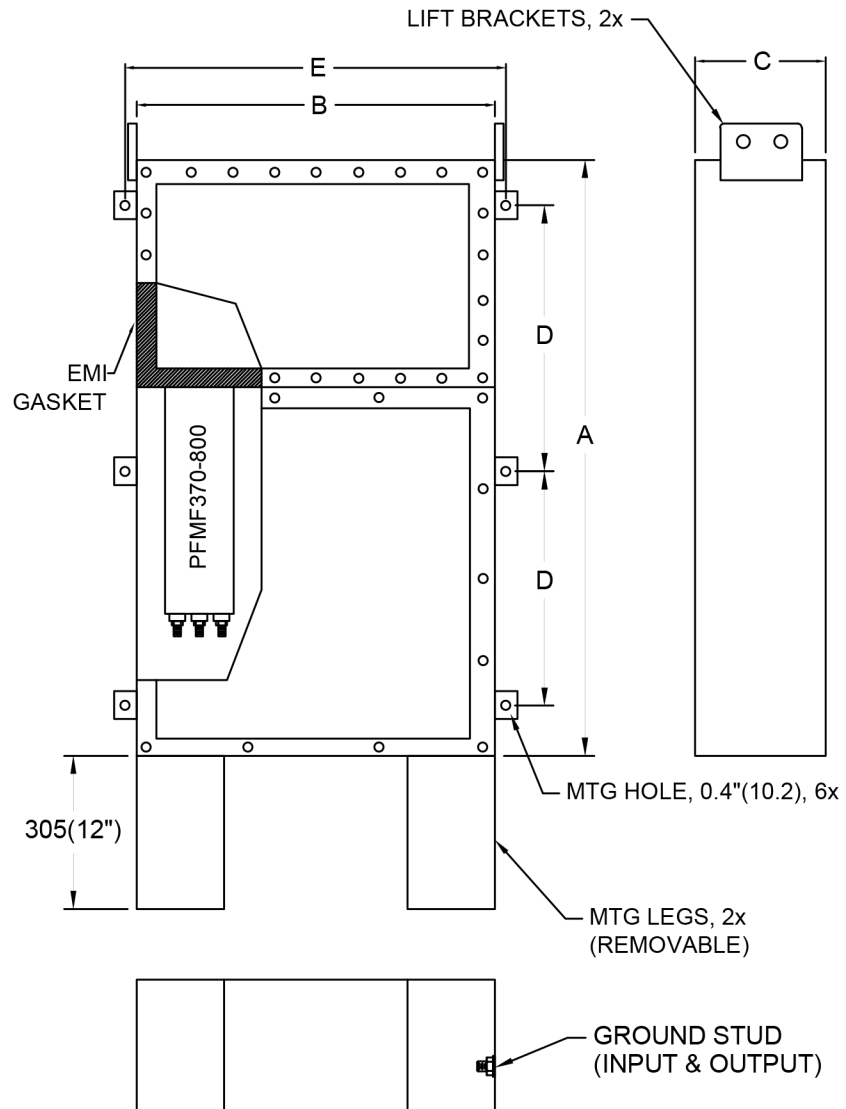

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.

| MODEL         | AMPS | TERMINAL | DIMENSIONS - MM (IN) |      |      |      |      | WEIGHT LBS(KG) |
|---------------|------|----------|----------------------|------|------|------|------|----------------|
|               |      |          | A                    | B    | C    | D    | E    |                |
| PFMF370-800-3 | 800  | 3xM16    | 2032                 | 1015 | 380  | 965  | 1065 | 950 (432)      |
|               |      |          | (80)                 | (40) | (15) | (38) | (42) |                |