

PFMT222S-150
2-LINE + GND TEMPEST FILTER
100dB@10KHZ


SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 150A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO INSTALLING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



CONFORMS TO
 UL STD 1283

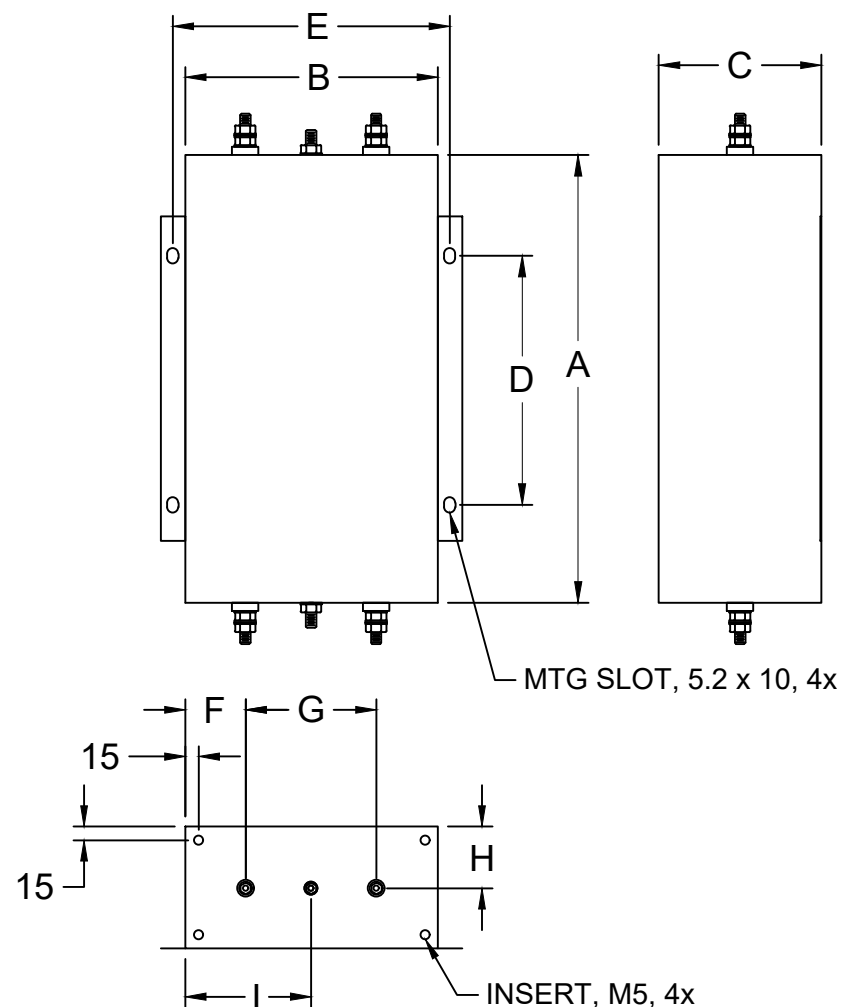

MODEL	AMPS	TERMINALS	DIMENSIONS (MM)								WEIGHT LBS(KG)	
			A	B	C	D	E	F	G	H		I
PFMT222S-150	150	M10	406	203	140	305	243	52	99	70	101.5	42 (19)
			(16)	(8)	(5.5)	(12)	(9.6)	(1.6)	(3.9)	(2.75)	(4)	