

**PFMT222S-600**  
**2-LINE + GND TEMPEST FILTER**  
**100dB@10KHZ**


**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC  
 MAX CURRENT: 600A/LINE  
 FREQUENCY: 50/60HZ  
 OPERATING TEMP.: -40 TO 70C  
 HIPOT (L-G): 2200VDC  
 (PRIOR TO INSTALLING DISCHARGE RESISTORS)  
 DISCHARGE VOLT. (@277V): <30V IN 30S  
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES  
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)  
 DESIGNED IN ACCORDANCE WITH THE  
 FOLLOWING STANDARDS:

MIL-STD-220  
 MIL-F-15733  
 MIL-STD-810  
 LV DIRECTIVE



CONFORMS TO  
 UL STD 1283

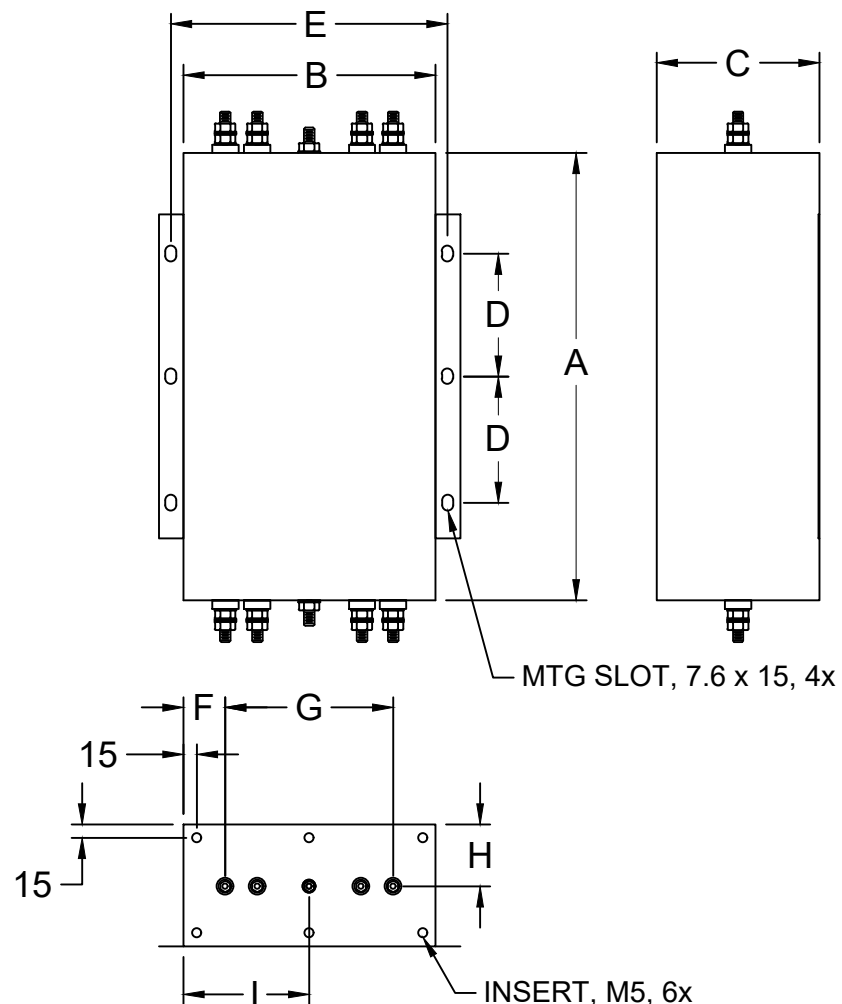

MODEL	AMPS	TERMINALS	DIMENSIONS (MM)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT222S-600	600	2xM16	965	381	203	381	419	70	241	102	190.5	262 (119)
			(38)	(15)	(8)	(15)	(16.5)	(2.76)	(9.5)	(4)	(7.5)	