

NOTE: LIFT BRACKETS PROVIDED ON CABINET

**PFMT355S-600**  
**3-LINE + GND TEMPEST FILTER**  
**INPUT/OUTPUT EMI COMPARTMENTS**

**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 600A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: >100dB (10KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH  
 THE FOLLOWING STANDARDS:

MIL-STD-220

MIL-F-15733


MIL-STD-810

LV DIRECTIVE



**Intertek**  
5025116

CONFORMS TO  
UL STD 1283

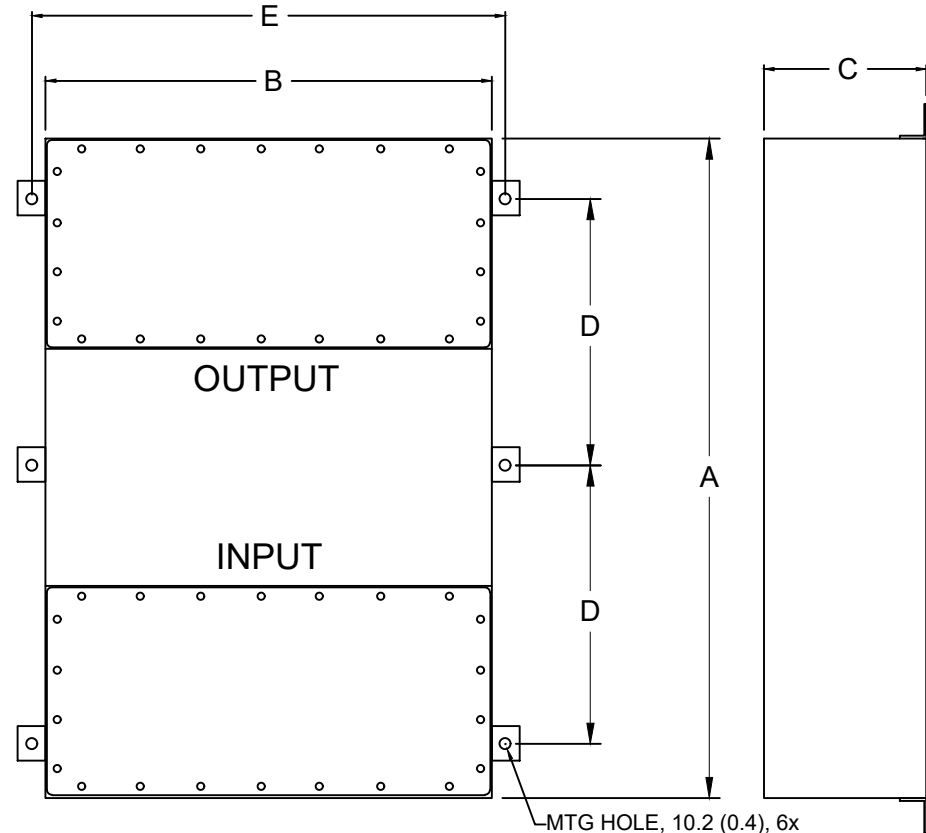

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMT355S-600	600	2xM16	1575	508	381	686	559	695(315.9)
			(62)	(20)	(15)	(27)	(22)	