

PrEMIer Filters



PFMT755-250-4

4-LINE + GROUND SCIF/TEMPEST FILTER

LOW KVAR DESIGN (<600 VAR/LINE)

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT/LINE: 250A

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT(LINE-GROUND): 2200VDC

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% AT FULL RATED UNITY LOAD

OVERLOAD: 140% OF RATED CURRENT FOR 15 MINUTES

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH THE

FOLLOWING STANDARDS:

MIL-STD-220

MI-F-15733


MIL-STD-810

LV DIRECTIVE



CONFORMS TO
UL STD 1283

EMI
GASKETED
COMPARTMENT

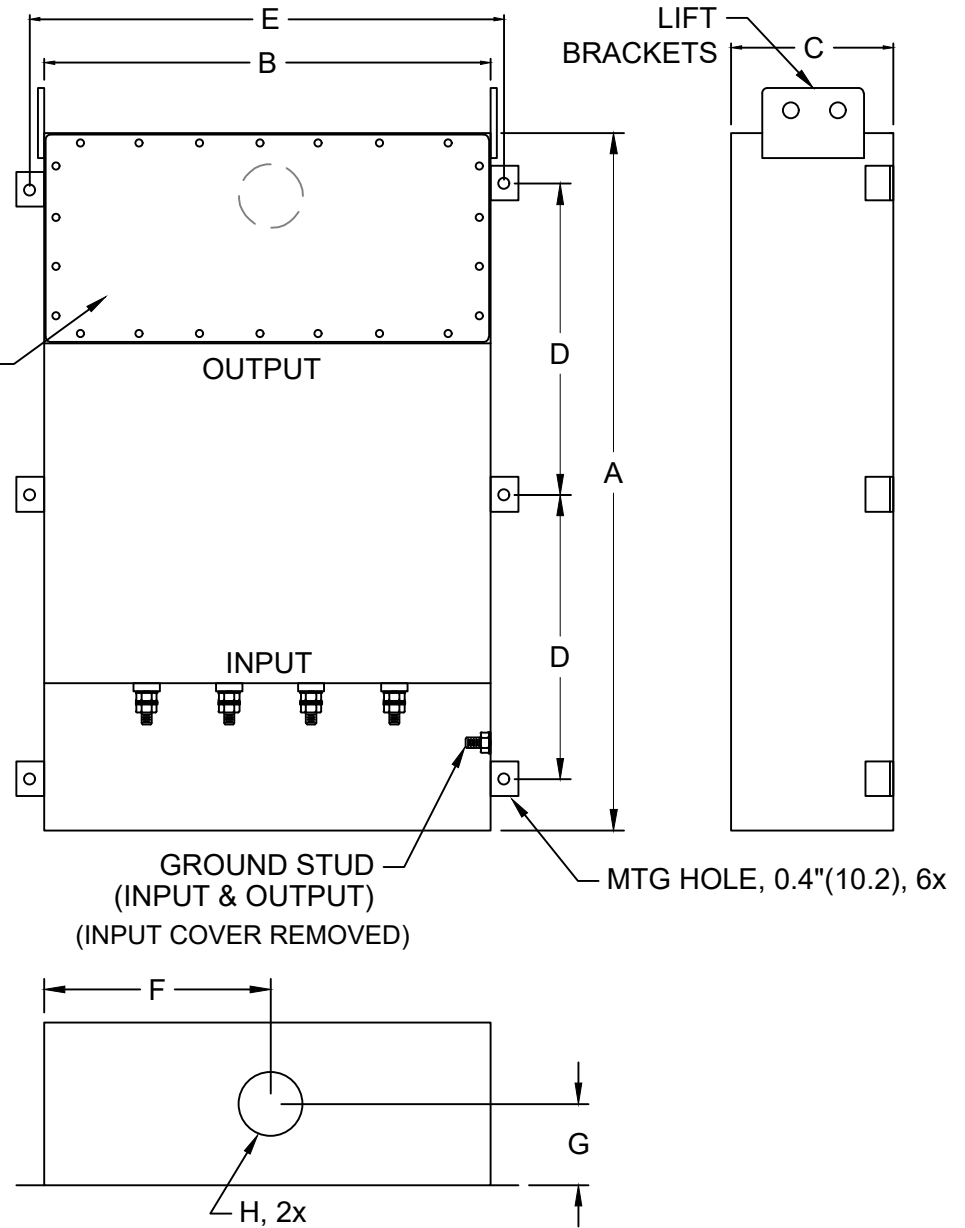

MODEL	AMPS	TERMINAL	DIMENSIONS, MM(IN)								WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	
PFMT755-250-4	250	M12	1067	610	203	483	660	305	102	75	220 (100)
			(42)	(24)	(8)	(19)	(26)	(12)	(4)	(2.95)	

SPECIFICATIONS SUBJECT TO CHANGE