



PFMF370-4000-3

3-LINE + GND SCIF/TEMPEST FILTER
SINGLE ELEMENT/MODULE PER LINE


SPECIFICATIONS

VOLTAGE: 0-277/0-480VAC
CURRENT: 4000A/LINE
FREQUENCY: 50/60HZ
OPER. TEMP.: -40 TO 65C
HIPOT (LG): 2200VDC
DISCHARGE VOLT.: <30V IN 30S
VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
HARMONICS: <2.5% (UNITY PF LOAD)
EST. WEIGHT, LB(KG): 4620(2100)
PERFORMANCE: >100dB (14KHZ TO 40GHZ)
SHIELDING EFFECTIVENESS: >100dB (14KHZ TO 40GHZ)
ENCLOSURE: NEMA 1 (12GA MINIMUM)
MANUFACTURED IN ACCORDANCE WITH THE
FOLLOWING STANDARDS:


MIL-STD-220
MIL-STD-202
MIL-STD-285
MIL-STD-810
MIL-F-15733



CONFORMS TO
UL STD 1283

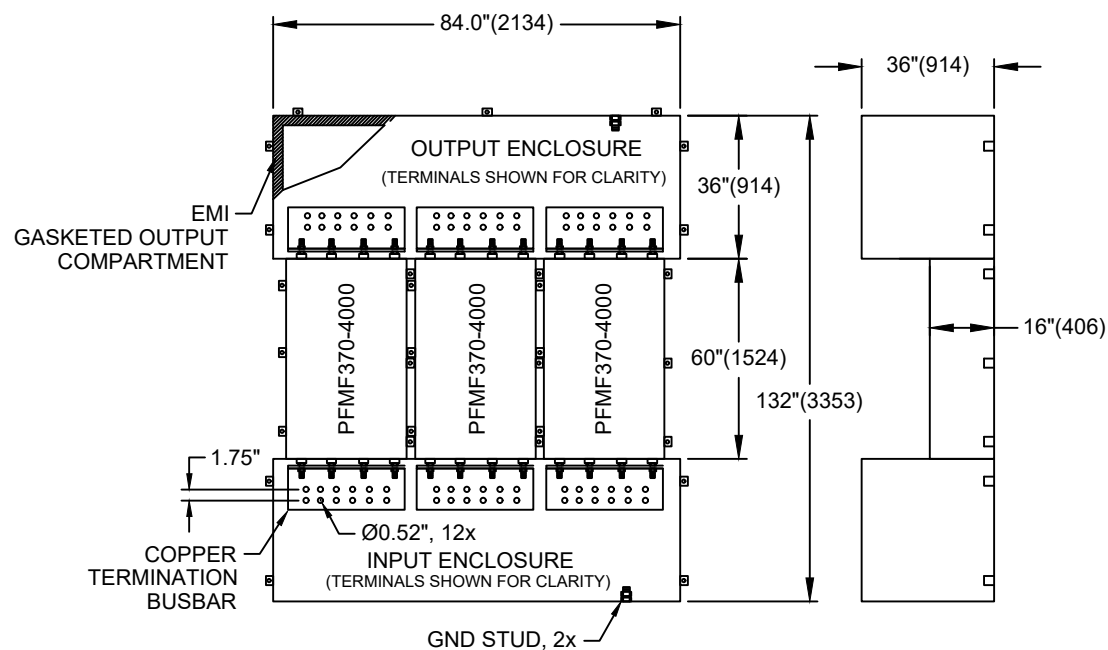

PER LINE END VIEW

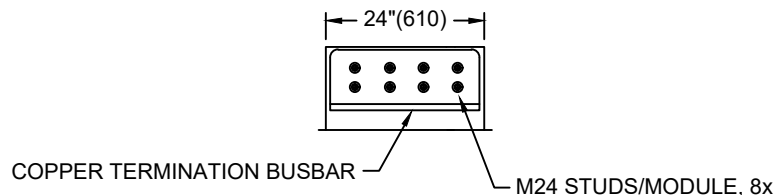

INPUT AND OUTPUT CONDUIT PENETRATIONS BY END USER
OPTIONAL MTG LEGS AVAILABLE PER CUSTOMER SPECIFICATIONS
VERTICAL INSTALLATION REQUIRES SECUREMENT TO WALL OR SIMILAR STRUCTURE
COPPER TERMINATION BUSBAR CAN BE MODIFIED PER CUSTOMER SPECIFICATIONS