



PFMF370-4000-4

4-LINE + GND SCIF/TEMPEST FILTER

INDIVIDUAL MODULES WITH END TERMINATION BOXES

SPECIFICATIONS

VOLTAGE: 0-277/0-480VAC

CURRENT: 4000A/LINE

FREQUENCY: 50/60HZ

OPER. TEMP.: -40 TO 65C

HIPOT (LG): 2200VDC

DISCHARGE VOLT.: <30V IN 30S

VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

TERMINALS: 8x24MM/LINE WITH COPPER

MOUNTING BRACKET

EST. WEIGHT, LB(KG): 5960(2709)

PERFORMANCE: >100dB (14KHZ TO 40GHZ)

SHIELDING EFFECTIVENESS: >100dB (14KHZ TO 40GHZ)

ENCLOSURE: NEMA 1 (12GA MINIMUM)

MANUFACTURED IN ACCORDANCE WITH THE

FOLLOWING STANDARDS:

MIL-STD-220

MIL-STD-810

MIL-F-15733


MIL-STD-202

MIL-STD-285




5025116

CONFORMS TO
UL STD 1283

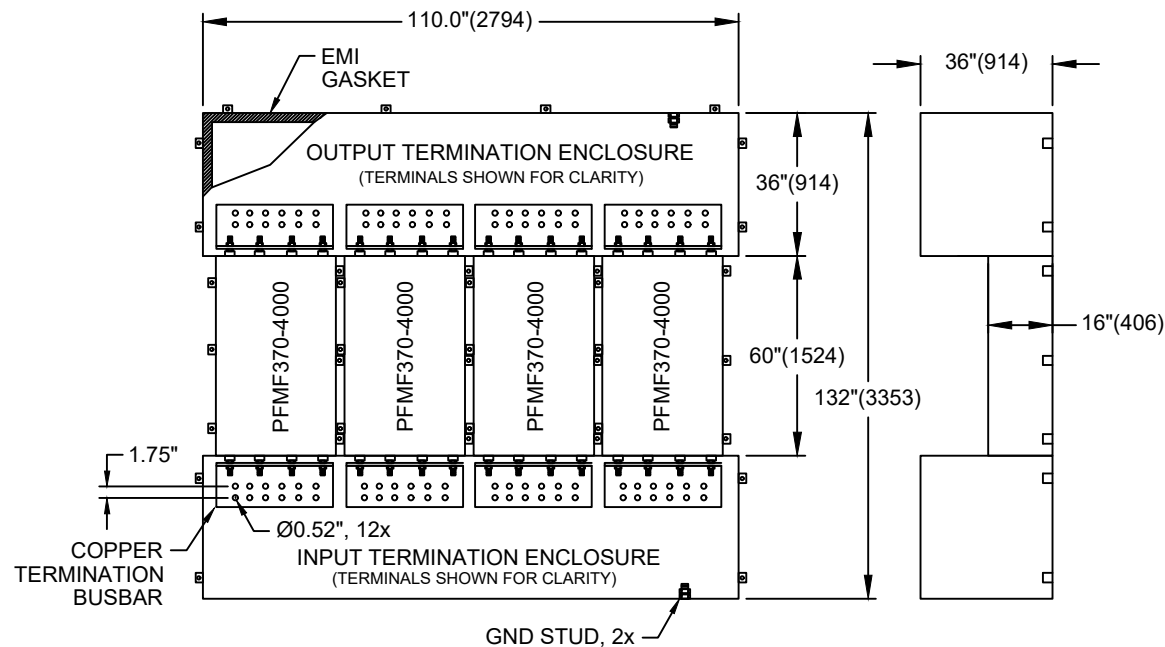

PER LINE END VIEW

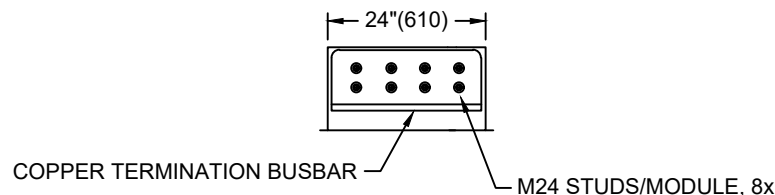

INPUT AND OUTPUT CONDUIT PENETRATIONS BY END USER
OPTIONAL MTG LEGS AVAILABLE PER CUSTOMER SPECIFICATIONS
VERTICAL INSTALLATION REQUIRES SECUREMENT TO WALL OR SIMILAR STRUCTURE
COPPER TERMINATION BUSBAR CAN BE MODIFIED PER CUSTOMER SPECIFICATIONS