



**PFMT755-400-4**  
**4-LINE + GND SCIF/TEMPEST FILTER**  
**LOW KVAR DESIGN (<600 VAR/LINE)**

**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 400A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

VOLTAGE DROP: <1% UNITY RATED LOAD

PERFORMANCE: >100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

MIL-STD-220

MIL-F-15733

MIL-STD-810


LV DIRECTIVE



Intertek  
5025116

CONFORMS TO  
UL STD 1283

EMI GASKETED  
COMPARTMENT

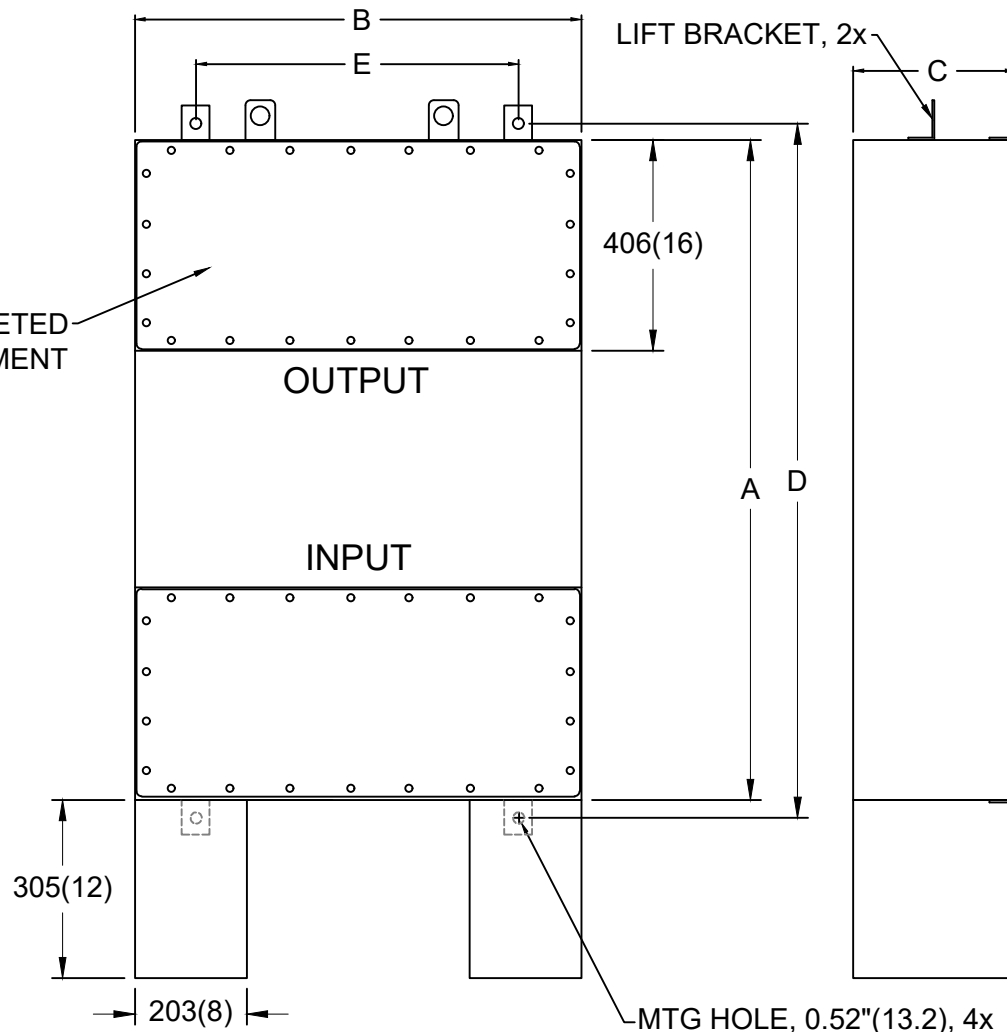

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMT755-400-4	400	2xM16	2337 (92)	990 (39)	381 (15)	2388 (94)	787 (31)	580(263.6)