



PFMT755-800-4
4-LINE + GND SCIF/TEMPEST FILTER
LOW KVAR DESIGN (<600 VAR/LINE)

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 800A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

VOLTAGE DROP: <1% UNITY RATED LOAD

PERFORMANCE: >100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

MIL-STD-220

MIL-F-15733

MIL-STD-810


LV DIRECTIVE



Intertek
5025116

CONFORMS TO
UL STD 1283

EMI GASKETED
COMPARTMENT

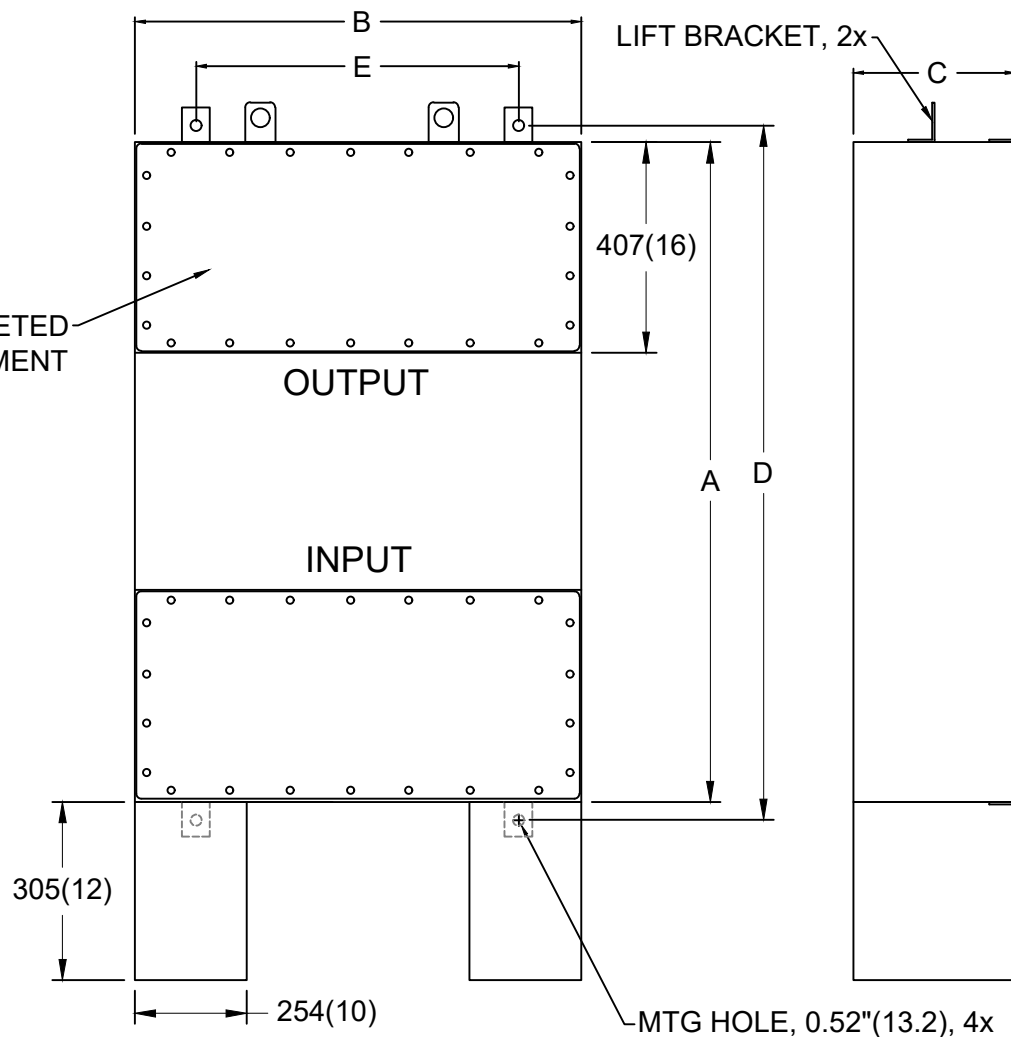

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMT755-800-4	800	3xM16	2540	1169	457	2591	1016	750(340.9)
			(100)	(46)	(18)	(102)	(40)	