



PFMH1000-1200-3 3-LINE + GND HEMP FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 1200A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

CURRENT HARMONICS: <2.5% (UNITY PF LOAD)

RF/SHIELDING EFFECTIVENESS: >100dB (14KHZ TO 10GHZ)

ENCLOSURE: NEMA 1 (14GA MINIMUM)

DESIGNED AND MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

MIL-STD-188-125-1A


MIL-STD-220

MIL-F-15733

MIL-STD-810

MIL-STD-202

MIL-STD-285

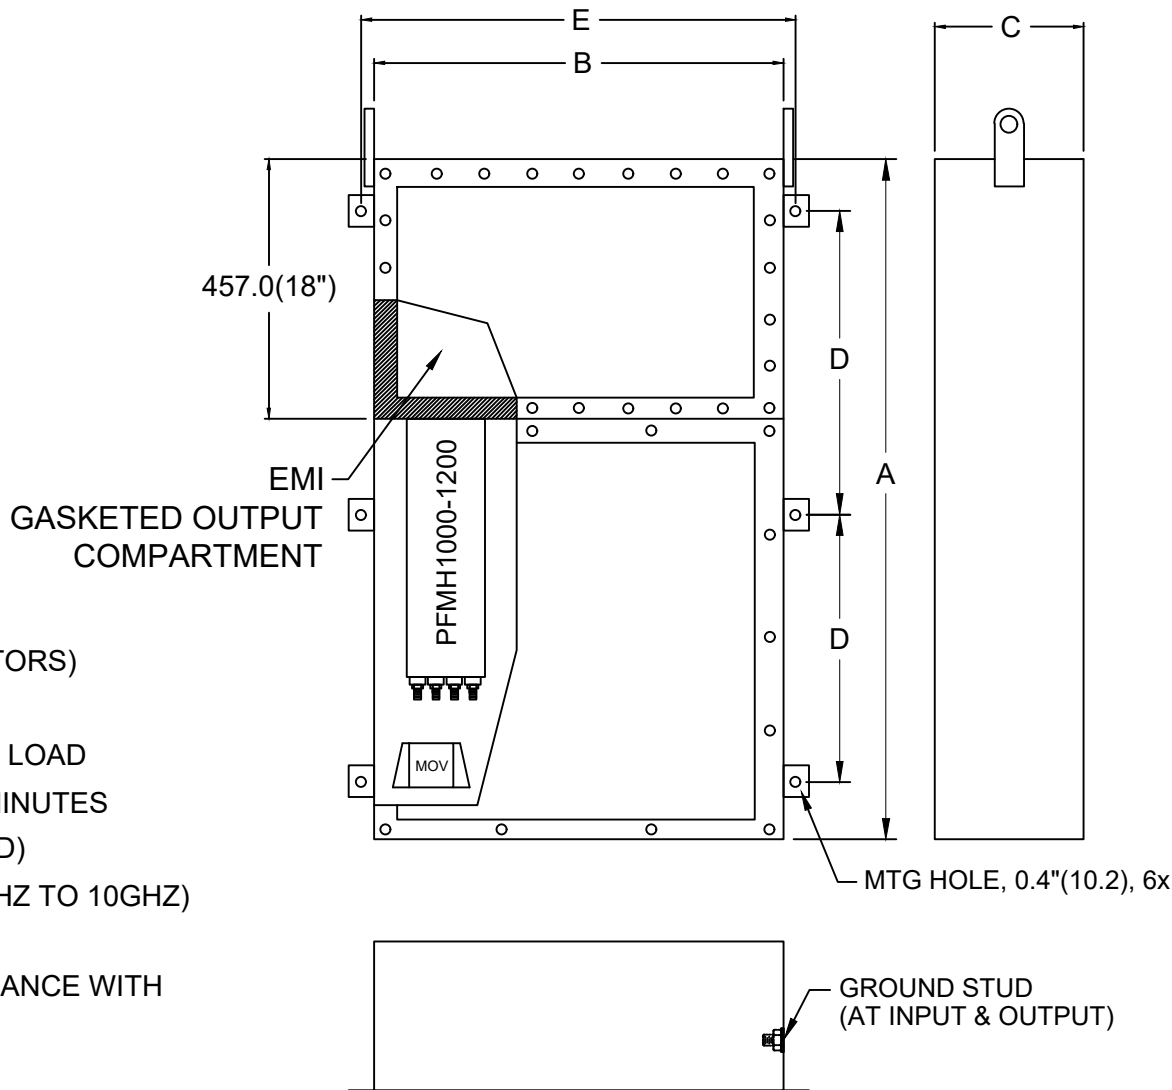

CONDUIT CUTOUTS BY END USER

| MODEL / PN | AMPS | TERMINAL | DIMENSIONS (MM) | | | | | WEIGHT LBS(KG) |
|-----------------|------|----------|-----------------|------|-----|------|------|----------------|
| | | | A | B | C | D | E | |
| PFMH1000-1200-3 | 1200 | 8xM12 | 2235 | 1168 | 457 | 1016 | 1219 | 1320 (600) |
| | | | 88 | 46 | 18 | 40 | 48 | |