



PFMH1000-16-1
1-LINE + GND HEMP FILTER


SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 16A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
 (PRIOR TO INSTALLING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD
- OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
- CURRENT HARMONICS: <2.5% (UNITY PF LOAD)
- RF/SHIELDING EFFECTIVENESS: >100dB (14KHZ TO 10GHZ)
- ENCLOSURE: NEMA 1 (16GA MINIMUM)
- DESIGNED AND MANUFACTURED IN ACCORDANCE WITH
 THE FOLLOWING STANDARDS:

- MIL-STD-188-125-1A
- MIL-STD-220
- MIL-F-15733
- MIL-STD-810
- MIL-STD-202
- MIL-STD-285



CONFORMS TO
 UL STD 1283

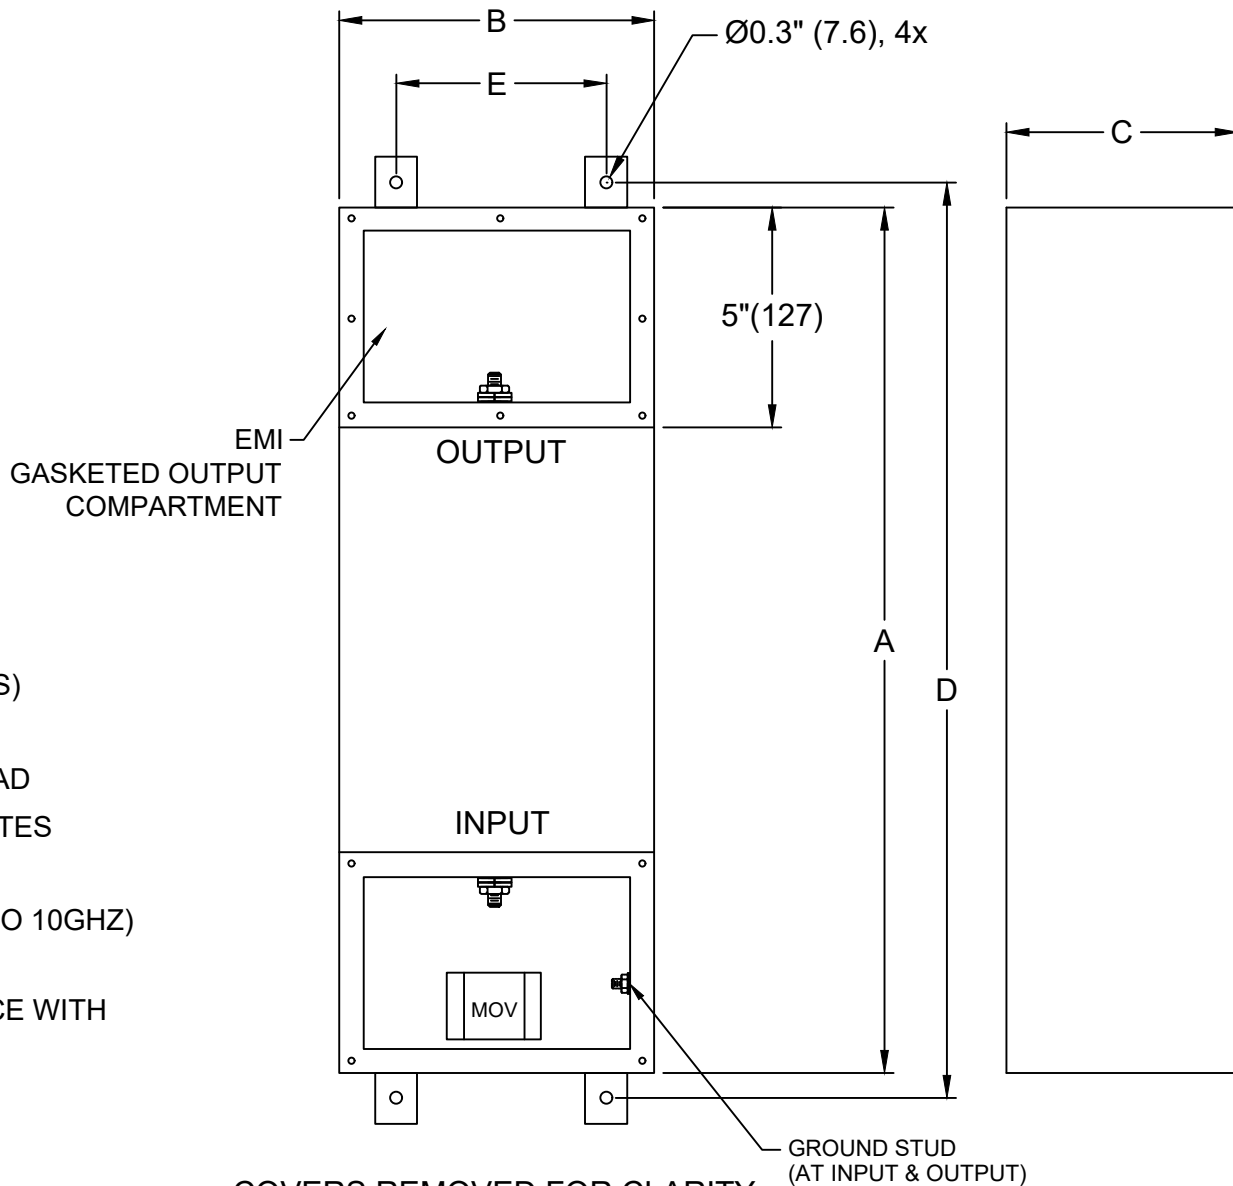

COVERS REMOVED FOR CLARITY

MODEL / PN	AMPS	TERMINAL	DIMENSIONS (MM)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMH1000-16-1	16	M6	432	127	114	470	76	16 (7.3)
			17	5	4.5	18.5	3	