PrEMIer Filters

MADE IN USA

PFMH1000-2400-4

4-LINE + GND HEMP FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
MAX CURRENT: 2400A/LINE
FREQUENCY: 50/60HZ
OPERATING TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
(PRIOR TO INSTALLING DISCHARGE RESISTORS)
DISCHARGE VOLT. (@277V): <30V IN 30S
VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD
OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
CURRENT HARMONICS: <2.5% (UNITY PF LOAD)
RF/SHIELDING EFFECTIVENESS: >100dB (14KHZ TO 10GHZ)
ENCLOSURE: NEMA 1 (14GA MINIMUM)
DESIGNED AND MANUFACTURED IN ACCORDANCE WITH
THE FOLLOWING STANDARDS:
MIL-STD-188-125-1A
MIL-STD-220
MIL-F-15733
MIL-STD-810
MIL-STD-202
MIL-STD-285

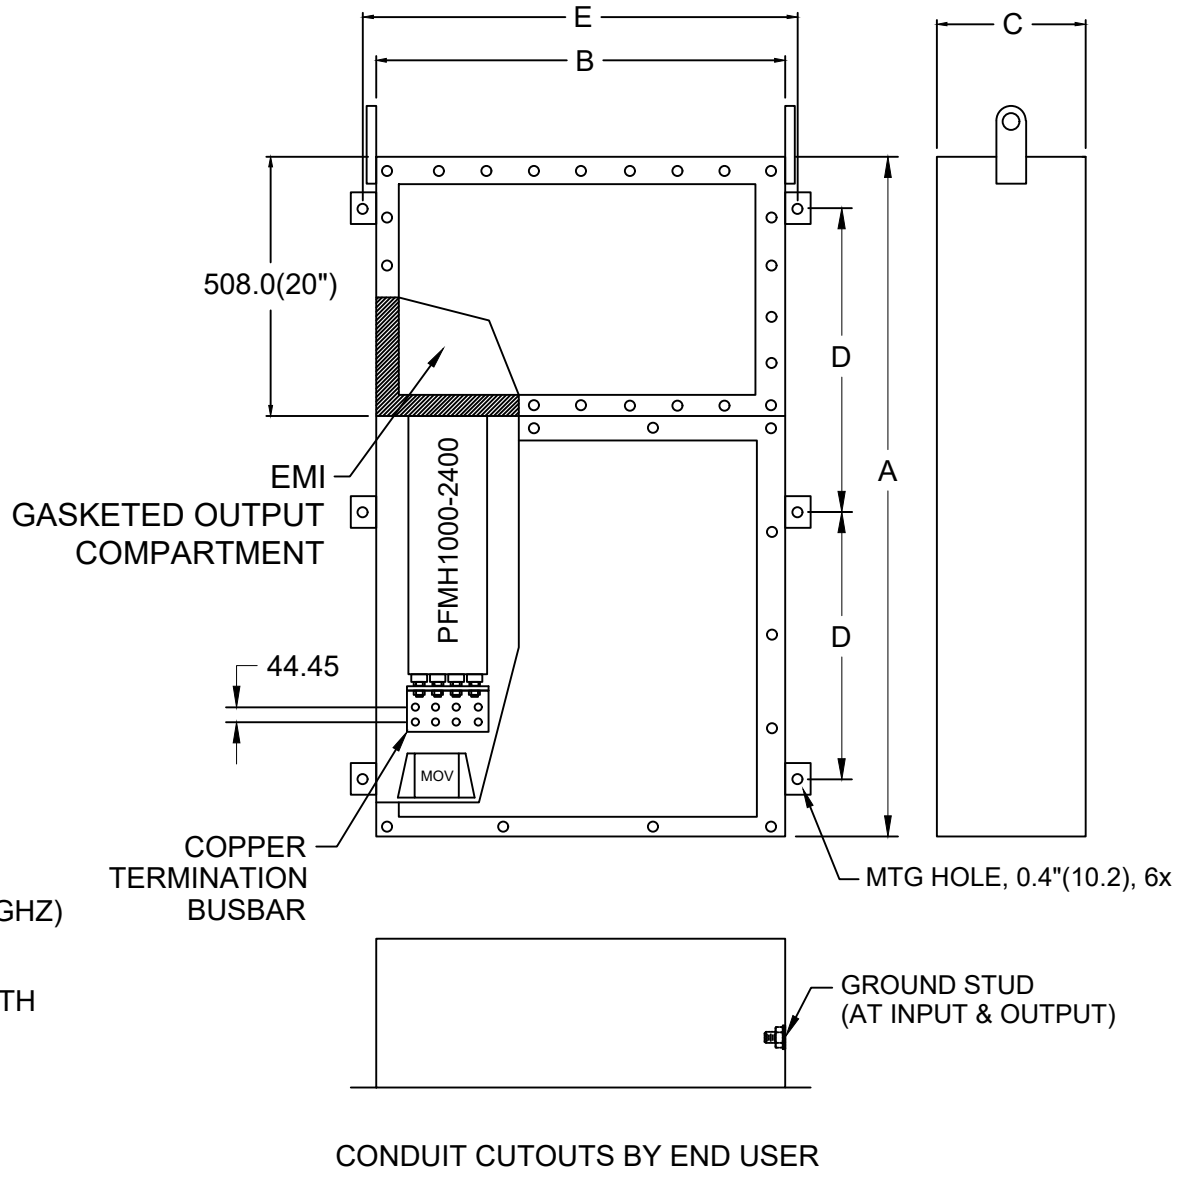

CONDUIT CUTOUTS BY END USER

MODEL / PN	AMPS	TERMINAL	DIMENSIONS (MM)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMH1000-2400-4	2400	8xM16	2235	1524	610	1118	1575	2700 (1227.3)
			96	60	24	44	62	

SPECIFICATIONS SUBJECT TO CHANGE